



Cisco Unified IP Phone 7911G Teardown

Disassembling Cisco IP phone

Written By: iman



Step 1 — Cisco Unified IP Phone 7911G Teardown

IP Phone 7911 Disassembling Cisco



By: Iman Ebrahimi Tajadod
i.ebrahimi@hotmail.com


- Insert wisdom here.

Step 2



- Remove the 4 screws securing the back .

Step 3

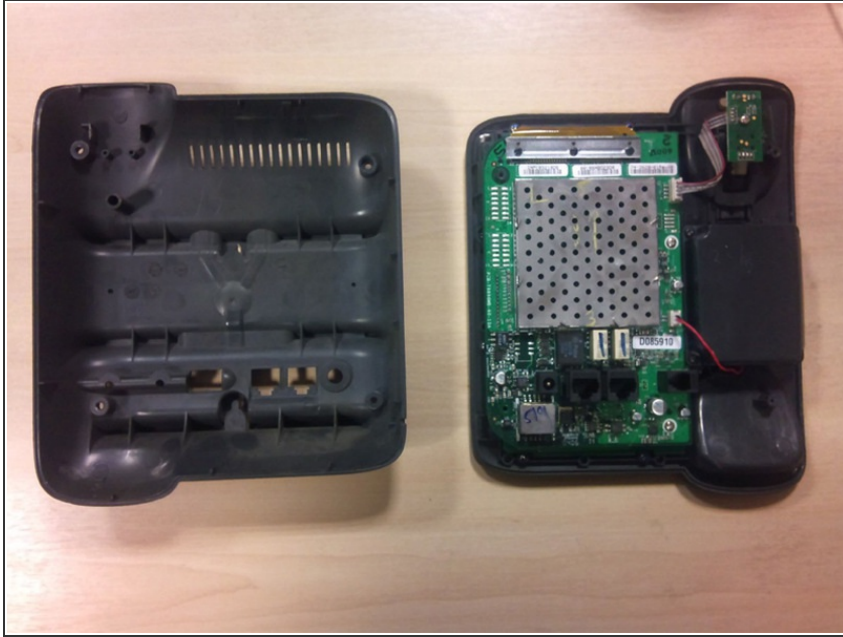

- Remove the back cover of the phone.

Step 4




- Insert wisdom here.

Step 5




- Insert wisdom here.

Step 6

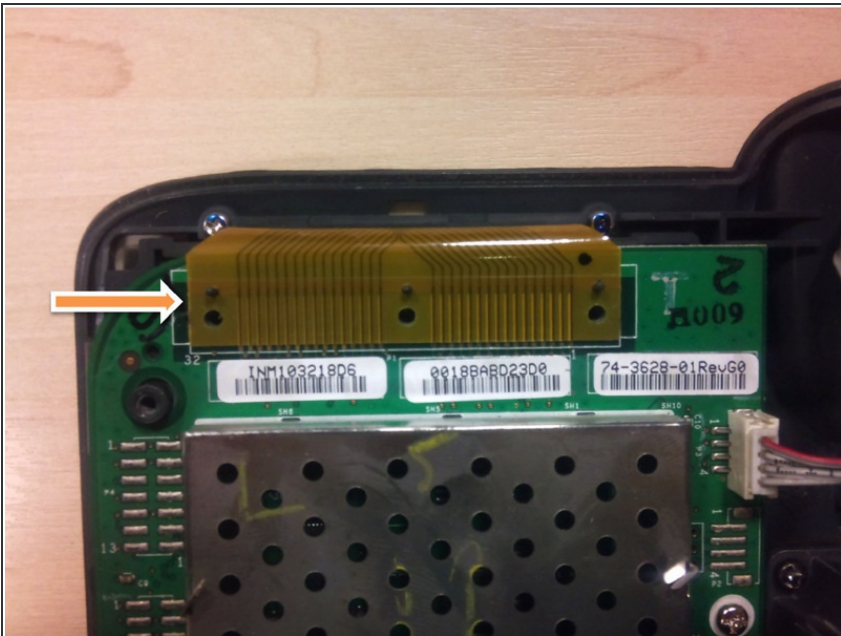


- Insert wisdom here.

Step 7

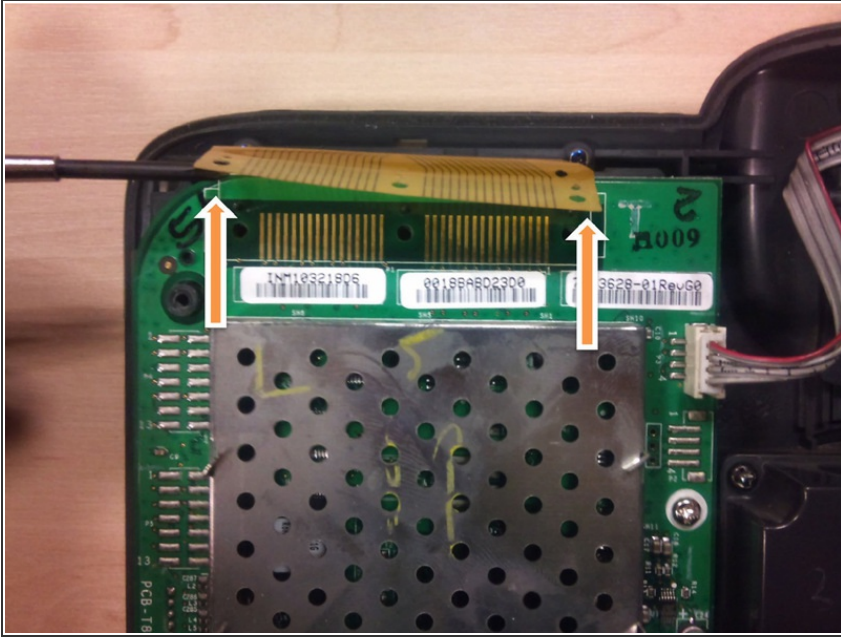

- Insert wisdom here.

Step 8

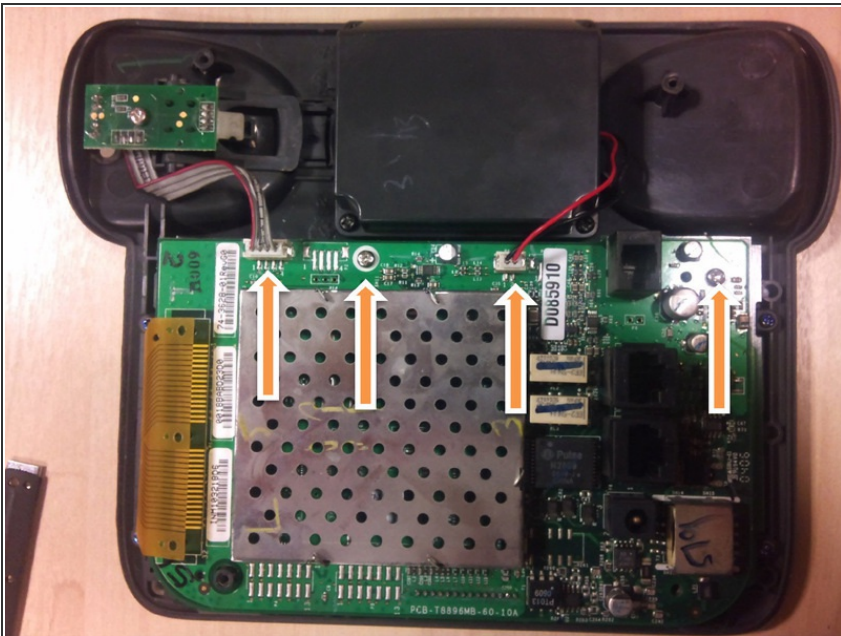


- Insert wisdom here.

Step 9




- Insert wisdom here.

Step 10

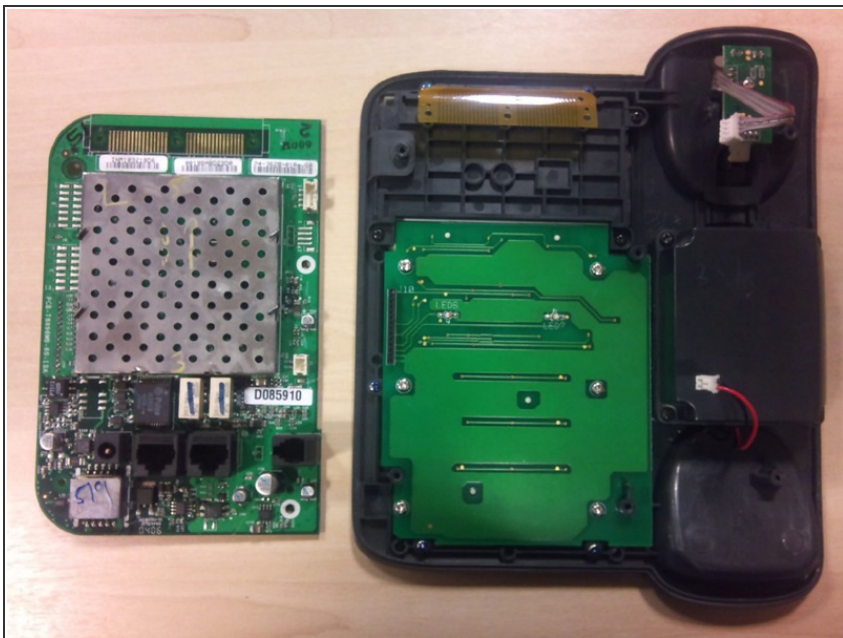

- Insert wisdom here.

Step 11

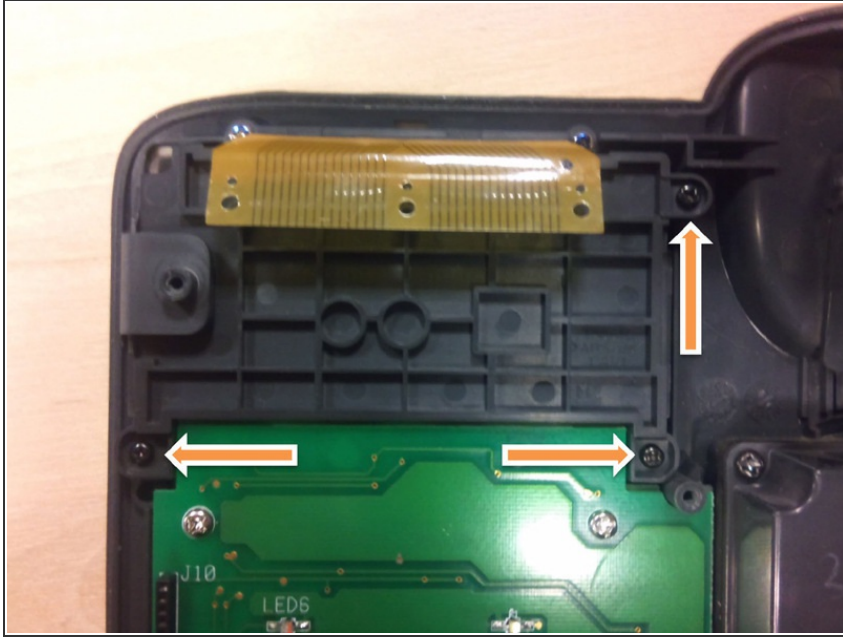


- Insert wisdom here.

Step 12



- Insert wisdom here.

Step 13

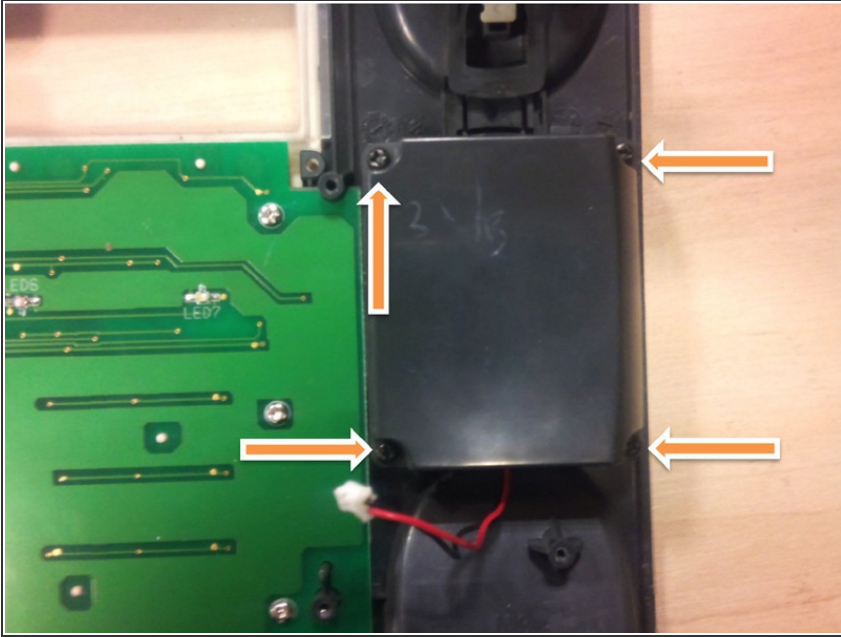


- Remove four phillips screws.

Step 14



- Insert wisdom here.

Step 15

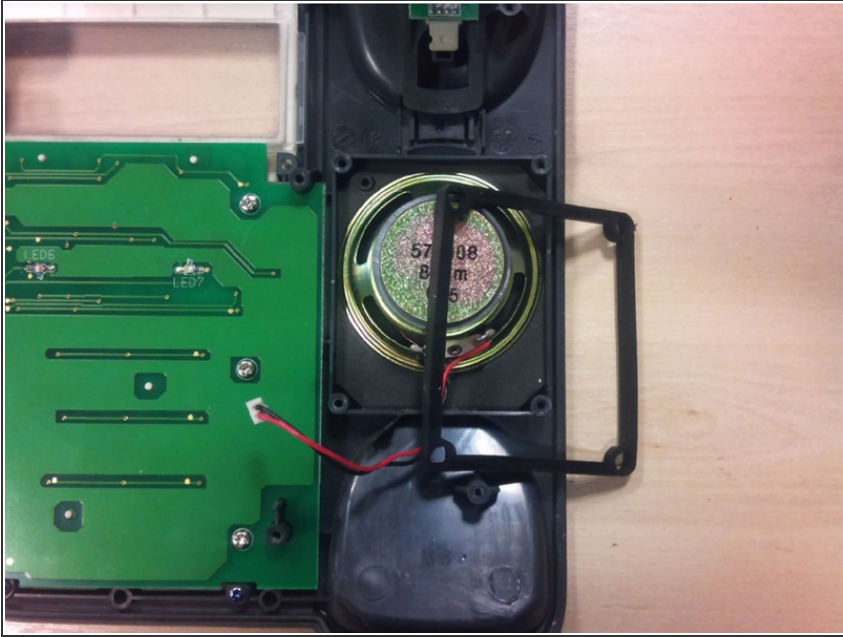


- Insert wisdom here.

Step 16



- Insert wisdom here.

Step 17

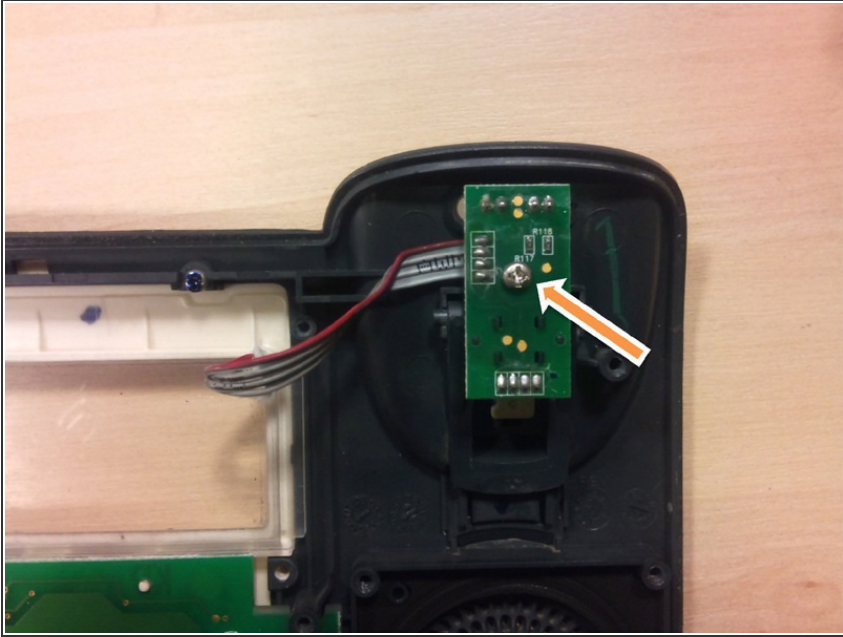


- Insert wisdom here.

Step 18




- Insert wisdom here.

Step 19

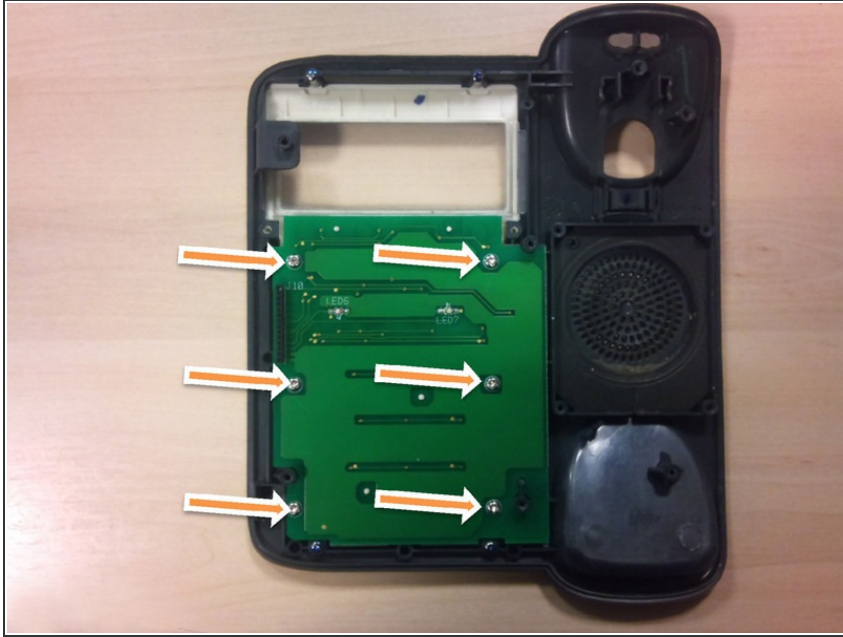


- Insert wisdom here.

Step 20

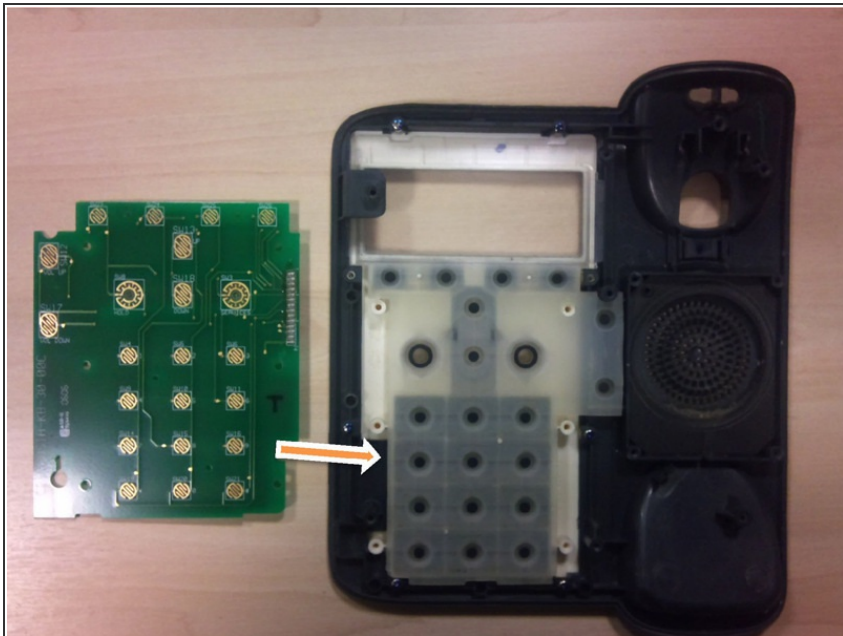

- Insert wisdom here.

Step 21

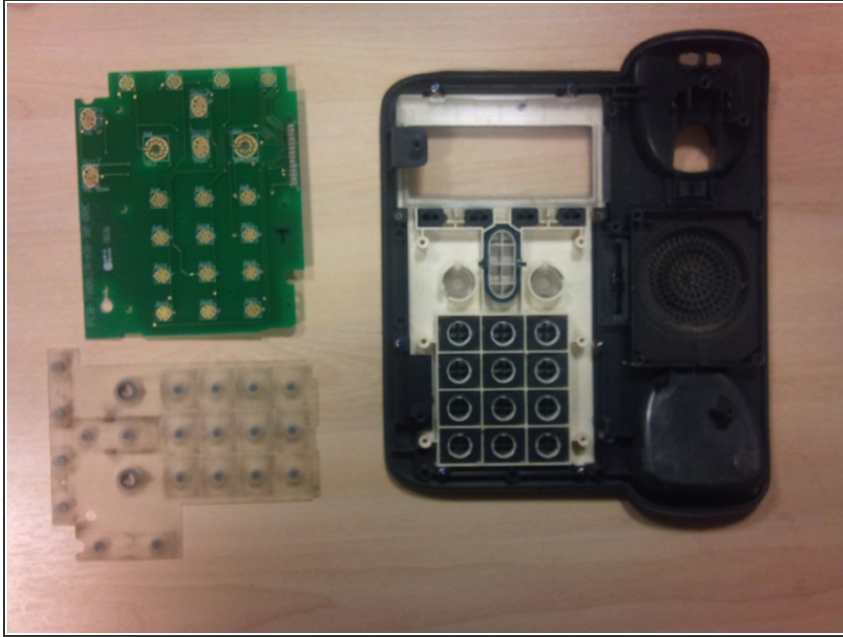


- Insert wisdom here.

Step 22



- Insert wisdom here.

Step 23

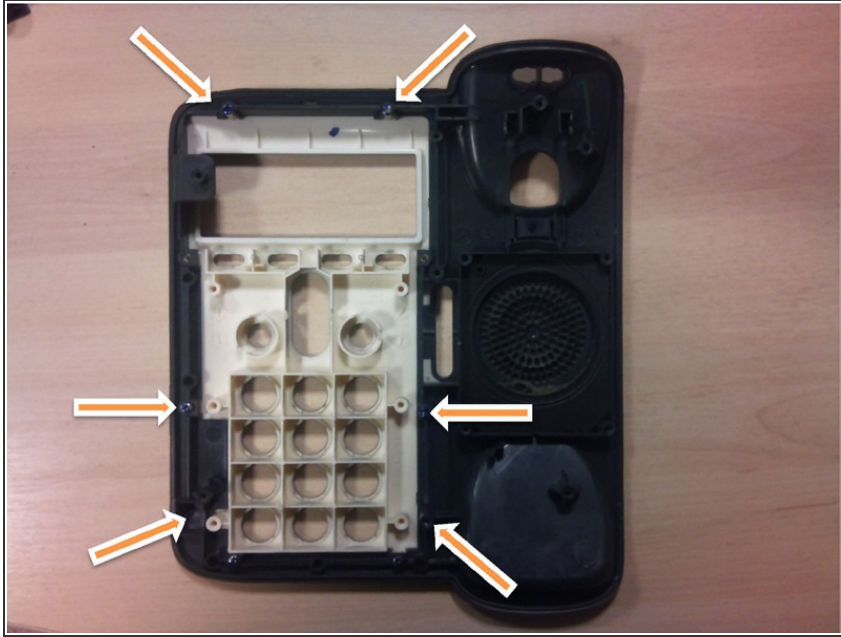


- Insert wisdom here.

Step 24



- Insert wisdom here.

Step 25

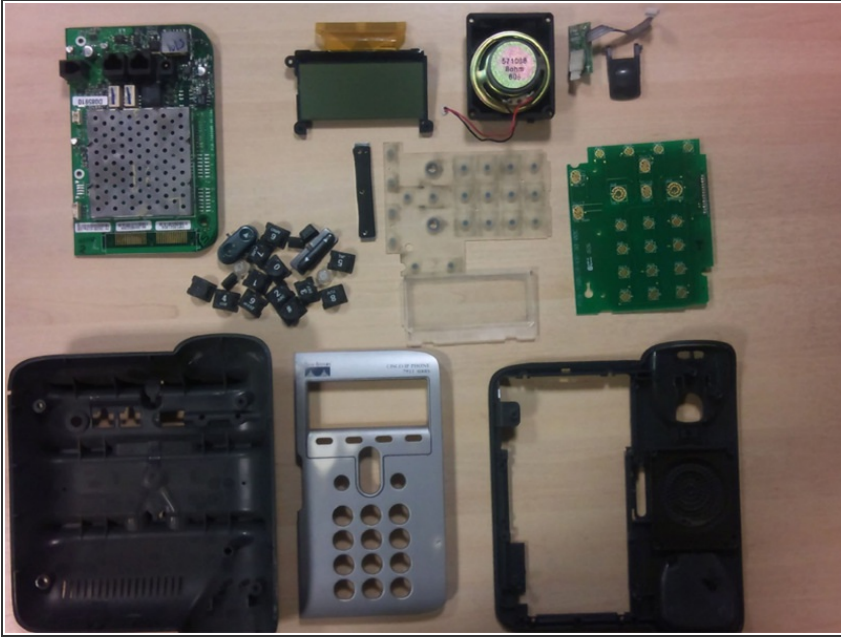

- Insert wisdom here.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-26 10:20:09 AM.